





DOUBLE-ACTION pump



Art. 30050



Art. 30200

Art. 30050 Hand-operated pump supplied with trolley (art. 80050) suitable for 30/60 kg drums

N° 2 packing m³ 0,040 kg 13,6

Art. 30200 Hand-operated pump for 180/220 kg drums (complete with pump/drum fixing ring)

N° 1 packing m³ 0,016 kg 4,4

| Article | 30050 | 30200 |
|--|----------|------------|
| Suitable for drums | 30/60 kg | 180/220 kg |
| Delivery hose length | 2 m | 2 m |
| Probe tube length | 0,75 m | 0,94 m |
| Quantity delivered for complete cycle of the lever | 220 g | 220 g |
| Max. oil density delivered | SAE 240 | SAE 240 |

Warning: Do not use flammable or corrosive liquids.



NOTE: A pump is said to be **double-action** when the pump piston delivers the fluid in its two alternating movements (i.e. both **up and down**).

With double action, delivery of the fluid is even and constant.




Manual oil dispensers with double-action delivery pump, suitable for high and low viscosity (density) oils.

These are arranged for direct application on the original oil drum.

Art. 32711

Digital litre-counter kit with partial and cumulative reading.

Complete with connection unions.

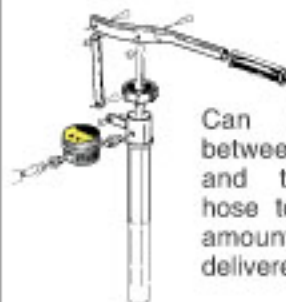

Can be placed between the pump and the delivery hose to control the amount of oil delivered.

Overall dimensions




art. 30050

art. 30200



The **double-action** hand-operated oil delivery pumps are provided with a lever which can be adjusted according to the viscosity of the oil being delivered.

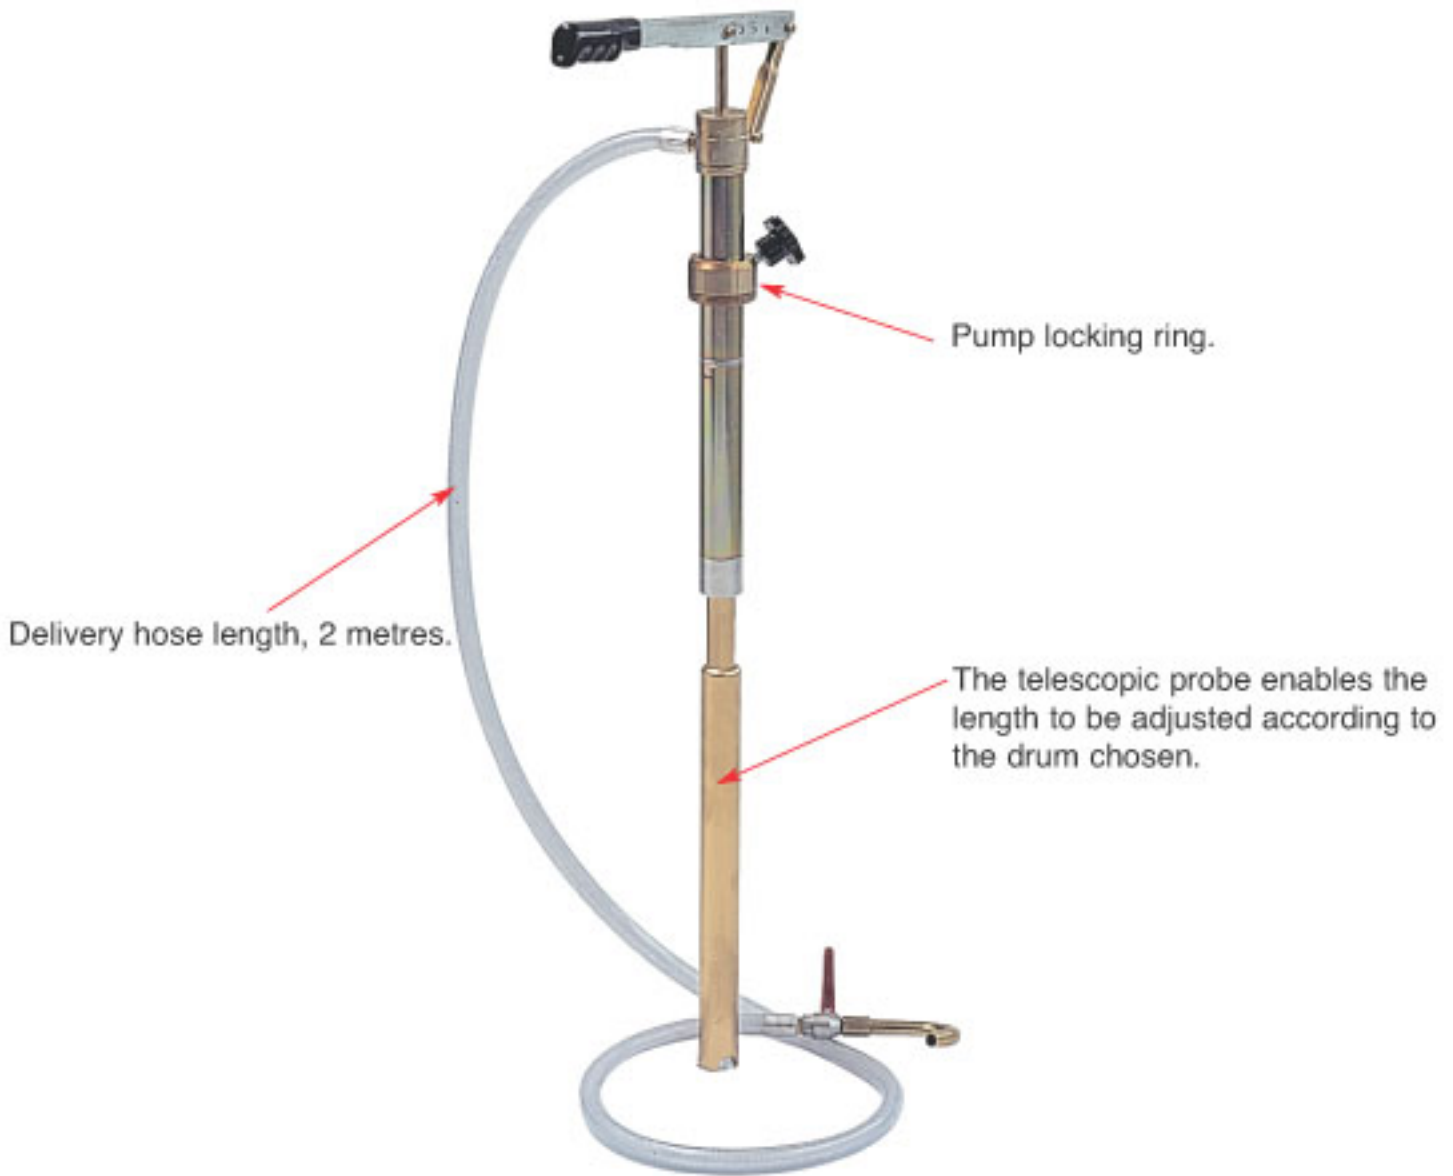

INDICATION TABLE FOR LEVER VARIATION

| Hooking position | Pumping piston-rod stroke | Compression ratio obtainable | Delivery capacity with each complete cycle (up/down stage) of the lever | Indication of types of oil that can be delivered according to the lever position |
|------------------|---------------------------|------------------------------|---|--|
| n° 4 | 127 mm | 1 : 1,5 | 220 gr | SAE W 20/50 |
| n° 3 | 127 mm | 1 : 2,2 | 220 gr | SAE W 80/90 |
| n° 2 | 100 mm | 1 : 3,6 | 170 gr | SAE W 85/140 |
| n° 1 | 60 mm | 1 : 6,9 | 100 gr | SAE W 240 |

By varying the lever pivot the pumping strength varies, with 4 possible oil deliveries according to viscosity.



DOUBLE-ACTION pump



Art. 32016 16lt

Art. 32024 24lt

Art. 24891



Oil dispensers with hand-operated double-action pump suitable for high-viscosity (density) oils.

These oil dispensers are normally used for filling or topping-up engine, gearbox, differential, etc.

Art. 32016 Portable hand-operated oil dispenser with 16-litre tank. Equipped with level gauge. Comes with antislash funnel (art.24891).

N° 1 packing m^3 0,080 kg 10,6

Art. 32024 Hand-operated oil dispenser with wheel-mounted 24-litre tank, equipped with level gauge. Comes with antislash funnel (art.24891).

N° 1 packing m^3 0,090 kg 13,7

| Article | 32016 | 32024 |
|--|----------|---------------|
| Tank capacity | 16 lt | 24 lt |
| Structure | portable | wheel-mounted |
| Delivery hose length | 2 m | 2 m |
| Quantity delivered for complete cycle of the lever | 220 g | 220 g |
| Max. oil density delivered | SAE 240 | SAE 240 |

Warning: Do not use flammable or corrosive liquids.



Art. 24891
Antislash funnel.

Funnel with antislash rim to prevent the liquid from spilling out when filling the tank.



Art.24891

Overall dimensions



art. 32016

art. 32024

DOUBLE-ACTION pump



Art. 24891

Art. 32065 65lt



Oil dispensers equipped with hand-operated double-action pump for high-viscosity (density) oils.

These **oil dispensers** are used for filling or topping-up: engine, gearbox, differential, hydraulic units, gear reducers, etc. Their 65 litre capacity offers long autonomy in use.

Art. 32065 Hand-operated oil dispenser with 65-litre wheel-mounted tank.
Equipped with level gauge
Comes with antispash funnel (art.24891).

N° 2 packing m³ 0,185 kg 24

| | |
|--|---------------|
| Article | 32065 |
| Tank capacity | 65 lt |
| Structure | wheel-mounted |
| Delivery hose length | 2 m |
| Quantity delivered for complete cycle of the lever | 220 g |
| Max. oil density delivered | SAE 240 |


Possibility of applying the **digital litre-counter kit** (Art. 32711)
See page 36

Important: Do not use flammable or corrosive liquids.



NOTE: A pump is said to be **double-action** when the pump piston delivers the fluid in its two alternating movements (i.e. both **up and down**).

With double action, delivery of the fluid is even and constant.

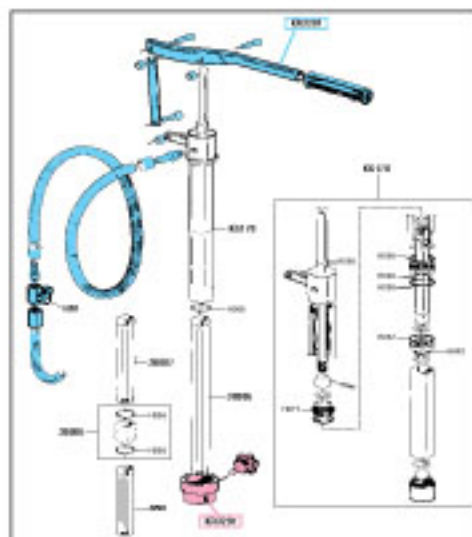

Overall dimensions





Wheel-mounted **oil dispensers** with hand-operated double-action pump suitable for high-viscosity (density) oils.

Used for filling or topping-up gearbox, differentials, etc.

The **oil dispenser** has a height-adjustable removable **side drip-catcher**, which collects any oil spilled during the filling operation.

Art. 30051 Hand-operated oil dispenser kit with removable drip-catcher.
Equipped with trolley (art.80050) suitable for 30/60 kg drums.

☐ N° 2 packing m³ 0,108 📦 kg 20,6

Art. 32067 Hand-operated oil dispenser kit with removable drip-catcher,
wheel-mounted 65-litre tank equipped with level gauge,
detachable tool tray
Comes with antispash funnel (art.24891).

☐ N° 2 packing m³ 0,232 📦 kg 31

Art. 32068 Hand-operated oil dispenser kit with removable drip-catcher,
wheel-mounted 65-litre tank equipped with level gauge,
digital litre-counter (art 32711 see page 36)
detachable tool tray
Comes with antispash funnel (art.24891).


☐ N° 2 packing m³ 0,232 📦 kg 32



Being removable, the drip catcher can be easily emptied and cleaned.

Being height-adjustable and turning on the support unit makes it easy to find the best position during work.

| Article | 30051 | 32067 | 32068 |
|--|---------------|---------------|---------------|
| Drum capacity | drums 30/60kg | 65 lt | 65 lt |
| Structure | wheel-mounted | wheel-mounted | wheel-mounted |
| Delivery hose length | 2 m | 2 m | 2 m |
| Quantity delivered for complete cycle of the lever | 220 g | 220 g | 220 g |
| Max. oil density delivered | SAE 240 | SAE 240 | SAE 240 |

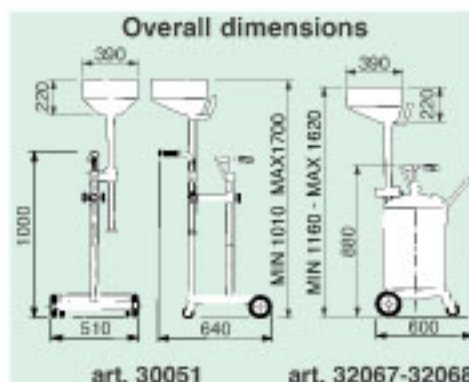

Warning: Do not use flammable or corrosive liquids.





Art. 33016 16lt

Art. 24891





Art. 33024 24lt





Pneumatic oil dispensers suitable for filling or topping-up oil.

Filled with oil (to 4/5 their capacity) and pressurized with air at 6-8 bar, they work autonomously anywhere and do not require continuous connection to the compressed-air line.

Art. 33016 Portable **pneumatic oil dispenser** with **16-litre tank**, equipped with level gauge delivery gun with flexible end. Comes with anti-splash funnel (art.24891).

 N° 1 packing m^3 0,080  kg 9,9

Art. 33024 **Pneumatic oil dispenser** with **24-litre tank**, equipped with level gauge delivery gun with flexible end. Comes with anti-splash funnel (art.24891).

 N° 1 packing m^3 0,090  kg 13,1

Art. 24891
Anti-splash funnel.

Funnel with anti-splash rim to prevent the liquid from spilling out when filling the tank.

| Article | 33016 | 33024 |
|----------------------------|----------|---------------|
| Tank capacity | 16 lt | 24 lt |
| Structure | portable | wheel-mounted |
| Delivery hose length | 2 m | 2 m |
| Gun hose length | 0,27 m | 0,27 m |
| Max. oil density delivered | SAE 130 | SAE 130 |

Possibility of applying the **digital litre-counter kit** (Art. 32711)
See page 36

Warning: Do not use flammable or corrosive liquids.


Overall dimensions




art. 33016




art. 33024

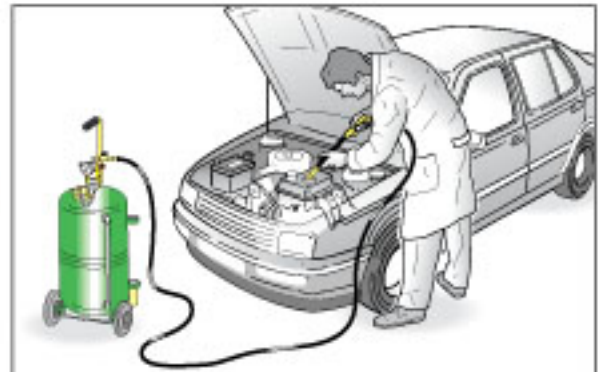


Example of use in topping-up or filling of engine oil.

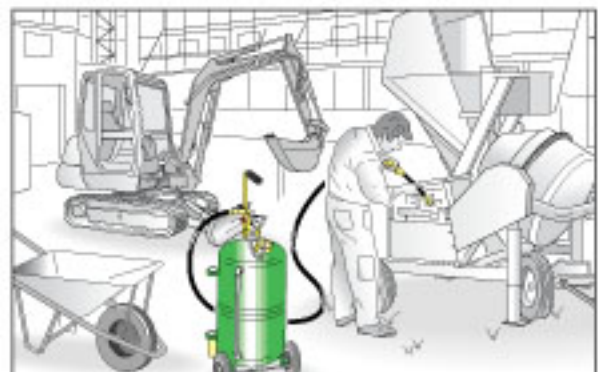

Example of use in topping-up or filling of lubrication oil.

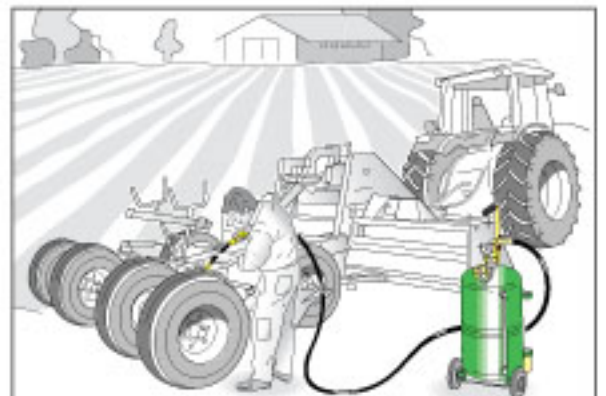

Example of use in topping-up or filling of lubrication oil in units.

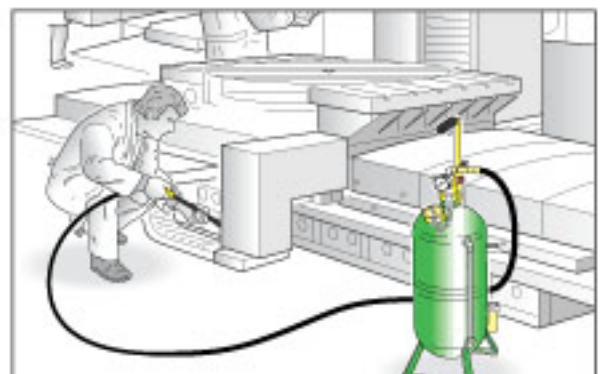

Example of use in topping-up or filling of lubrication oil in units.